


Feature

- 30V,20A
- $R_{DS(ON)} < 20m\Omega @ V_{GS}=10V$ TYP:15 mΩ
- $R_{DS(ON)} < 36m\Omega @ V_{GS}=4.5V$ TYP:28 mΩ
- Advanced Trench Technology
- Lead free product is acquired
- Excellent $R_{DS(ON)}$ and Low Gate Charge

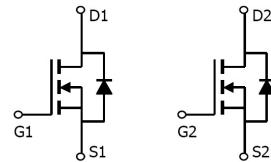

Schematic diagram

Application

- PWM applications
- Load Switch
- Power management



Marking and pin assignment

Package Marking and Ordering Information

Device Marking	Device	Device Package	Reel Size	Tape width	Quantity (PCS)
4822QD	AP4822QD	PDFN3X3-8L	13 inch	-	5000

ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ($T_a = 25^\circ C$)	I_D	20	A
Continuous Drain Current ($T_a = 100^\circ C$)	I_D	14	A
Pulsed Drain Current ⁽¹⁾	I_{DM}	60	A
Single Pulsed Avalanche Energy ⁽²⁾	E_{AS}	12.25	mJ
Power Dissipation	P_D	4.8	W
Thermal Resistance from Junction to Case ⁽⁴⁾	R_{eJC}	26	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55~+150	°C

MOSFET ELECTRICAL CHARACTERISTICS($T_a=25^\circ C$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Type	Max	Unit
Static Characteristics						
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	30	-	-	V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = 30V, V_{GS} = 0V$	-	-	1	μA
Gate-body leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$	-	-	± 100	nA
Gate threshold voltage ⁽³⁾	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	1	1.6	2.5	V
Drain-source on-resistance ⁽³⁾	$R_{DS(on)}$	$V_{GS} = 10V, I_D = 10A$	-	15	20	$m\Omega$
		$V_{GS} = 4.5V, I_D = 5A$	-	28	36	
Dynamic characteristics						
Input Capacitance	C_{iss}	$V_{DS} = 15V, V_{GS} = 0V, f = 1MHz$	-	490	-	pF
Output Capacitance	C_{oss}		-	79	-	
Reverse Transfer Capacitance	C_{rss}		-	61	-	
Switching characteristics						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 15V, I_D = 8A, V_{GS} = 10V, R_G = 3\Omega$	-	4.5	-	ns
Turn-on rise time	t_r		-	2.5	-	
Turn-off delay time	$t_{d(off)}$		-	14.5	-	
Turn-off fall time	t_f		-	3.5	-	
Total Gate Charge	Q_g	$V_{DS} = 15V, I_D = 8A, V_{GS} = 10V$	-	5.2	-	nC
Gate-Source Charge	Q_{gs}		-	0.9	-	
Gate-Drain Charge	Q_{gd}		-	1.3	-	
Source-Drain Diode characteristics						
Diode Forward voltage ⁽³⁾	V_{DS}	$V_{GS} = 0V, I_S = 10A$	-	-	1.2	V
Diode Forward current ⁽⁴⁾	I_S		-	-	20	A

Notes:

1. Repetitive Rating: pulse width limited by maximum junction temperature
2. EAS Condition: $T_J = 25^\circ C, V_{DD} = 30V, R_G = 25\Omega, L = 0.1mH$
3. Pulse Test: pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
4. Surface Mounted on FR4 Board, $t \leq 10$ sec

Test Circuit

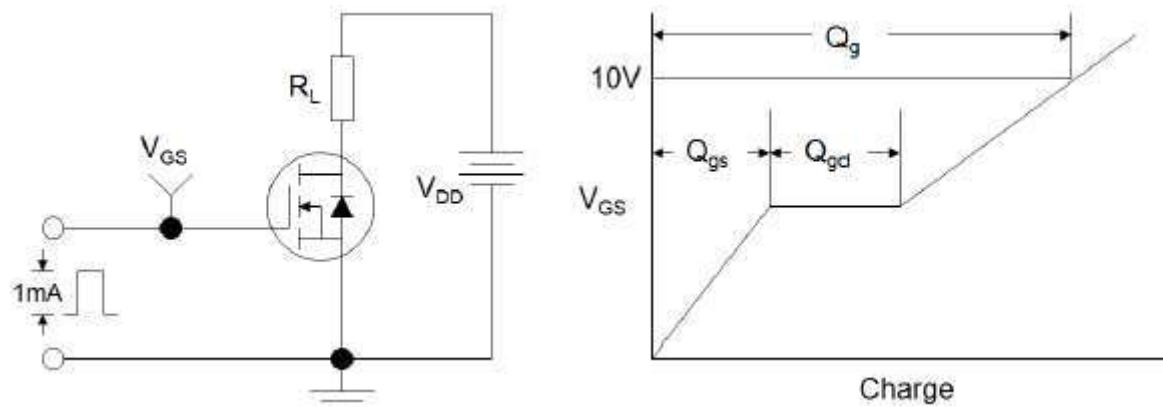


Figure1:Gate Charge Test Circuit & Waveform

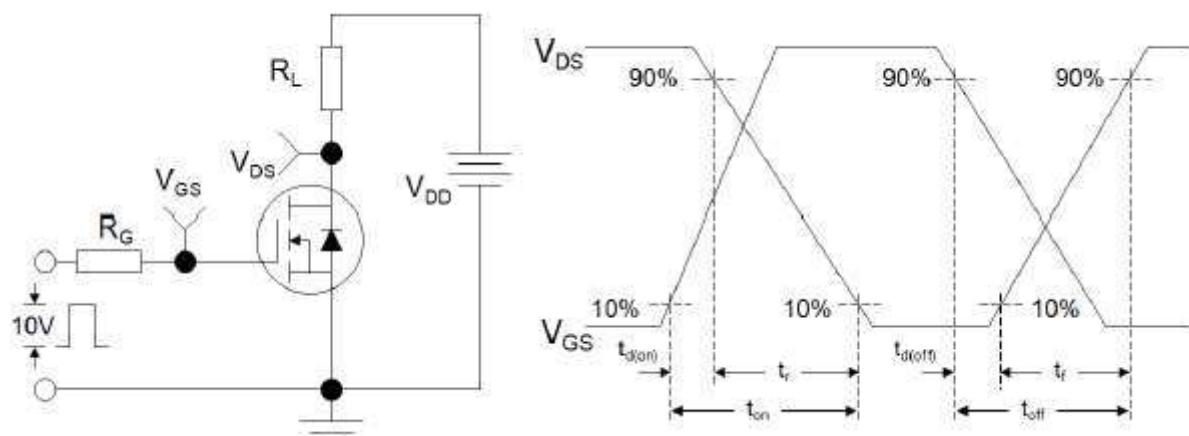


Figure 2: Resistive Switching Test Circuit & Waveforms

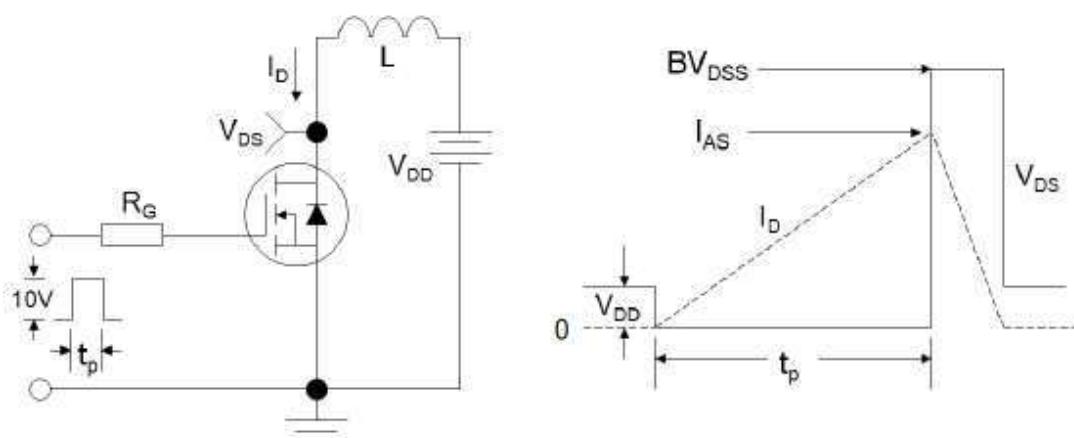


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms

Figure 1: Output Characteristics

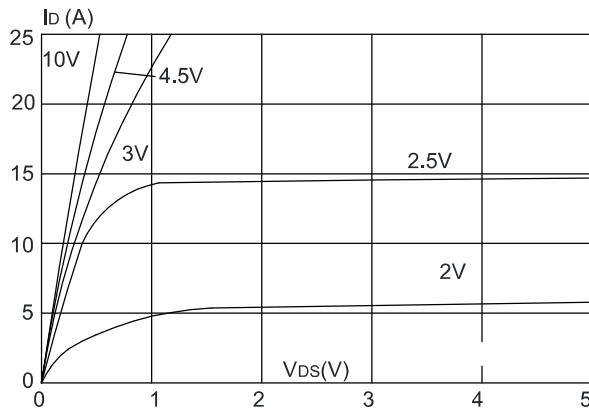


Figure 3: On-resistance vs. Drain Current

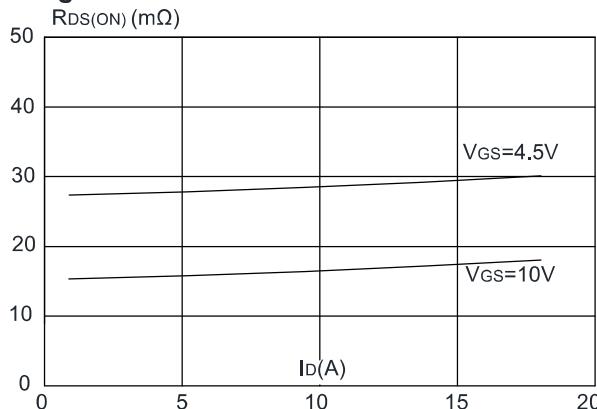


Figure 5: Gate Charge Characteristics

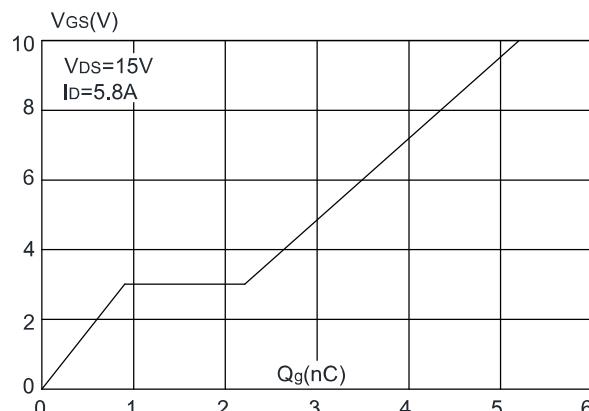


Figure 2: Typical Transfer Characteristics

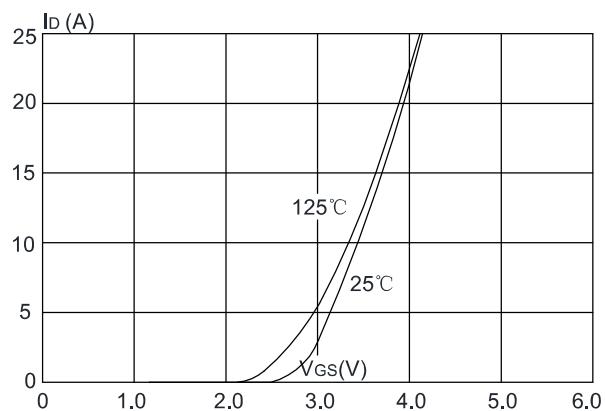


Figure 4: Body Diode Characteristics

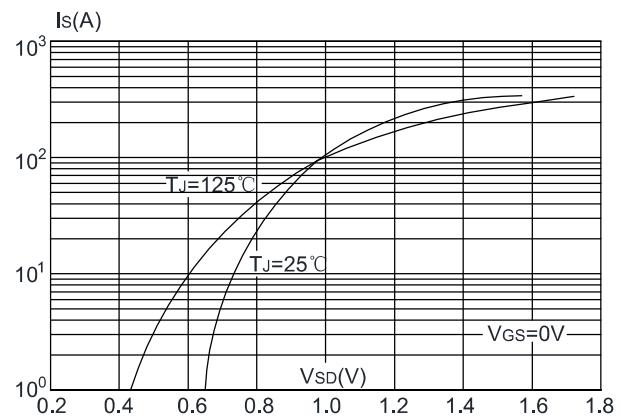


Figure 6: Capacitance Characteristics

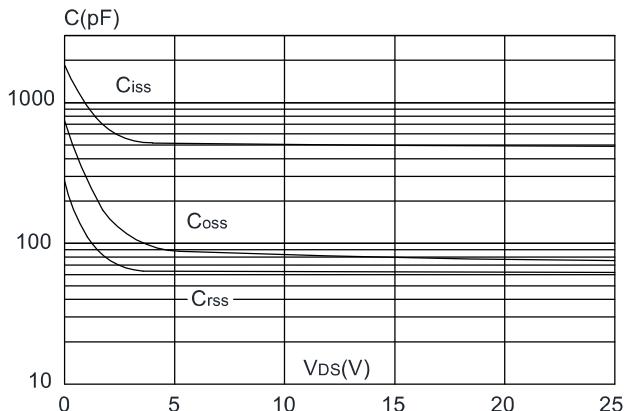


Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

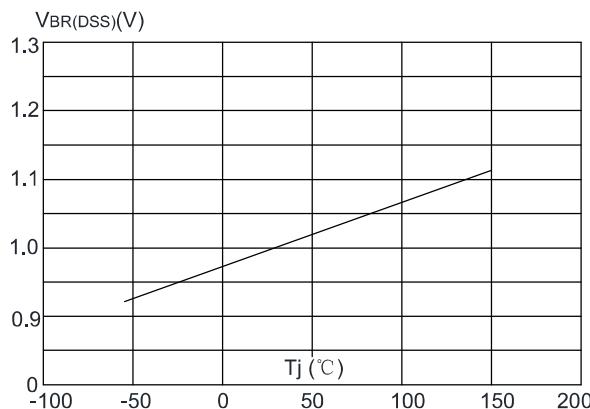


Figure 8: Normalized on Resistance vs. Junction Temperature

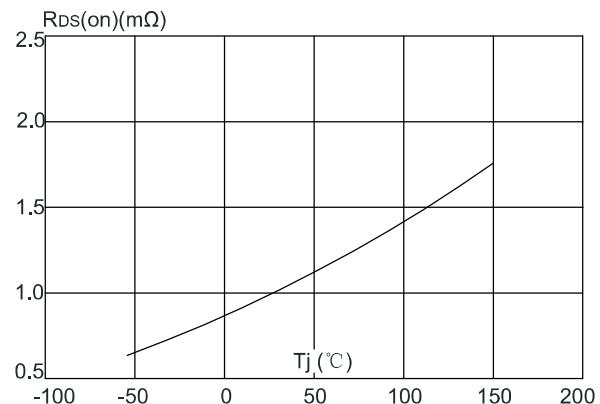


Figure 9: Maximum Safe Operating Area

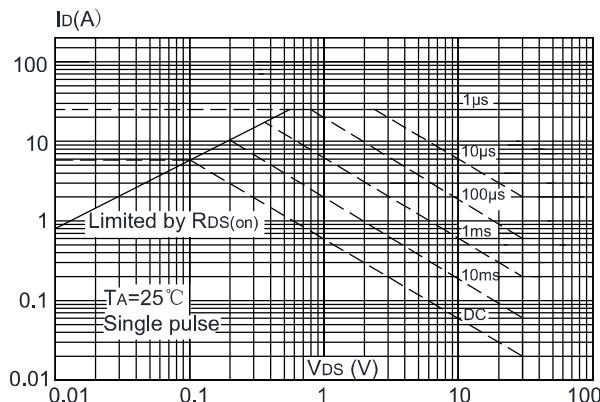


Figure 10: Maximum Continuous Drain Current vs. Ambient Temperature



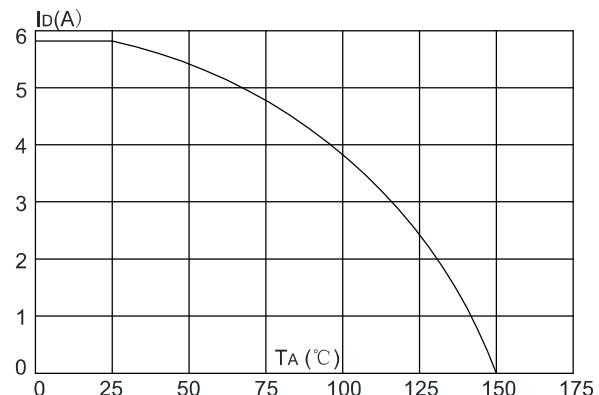


Figure 11: Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

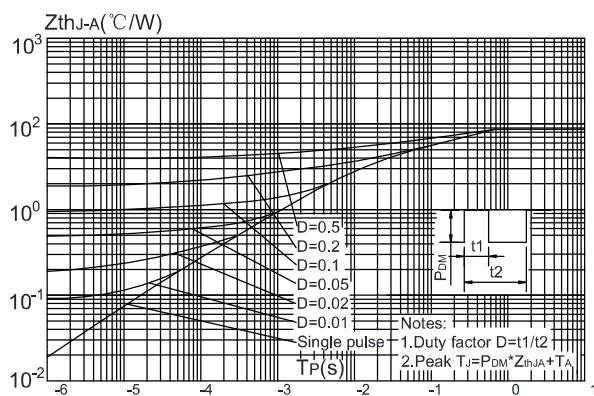

PDFN3X3-8L Package Information

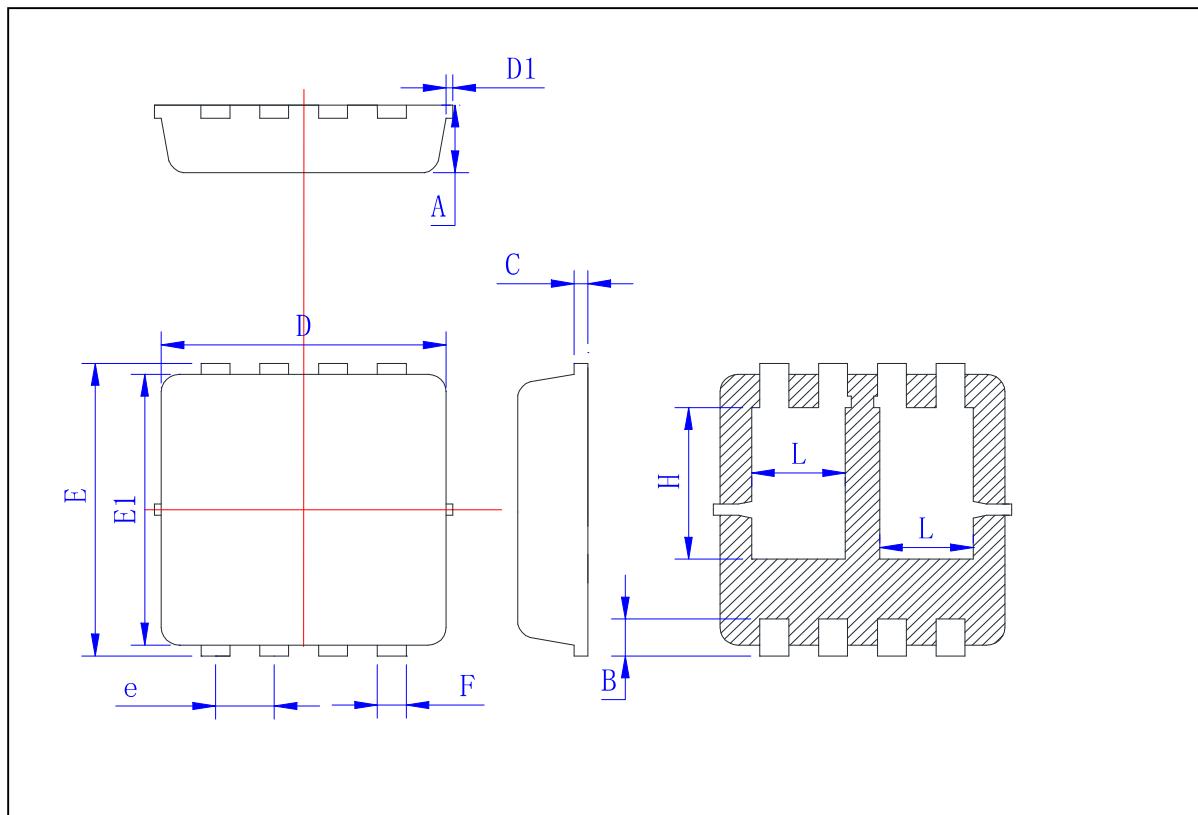

Symbol	Min	Typ	Max
A	0.725	0.775	0.825
B	0.28	0.38	0.48
C	0.13	0.15	0.20
D	3.05	3.15	3.25
D1			0.10
E	3.25	3.35	3.45
E1	3.0	3.1	3.2
e	0.60	0.65	0.70
F	0.27	0.32	0.37
H	1.63	1.73	1.83
L	0.93	1.03	1.13